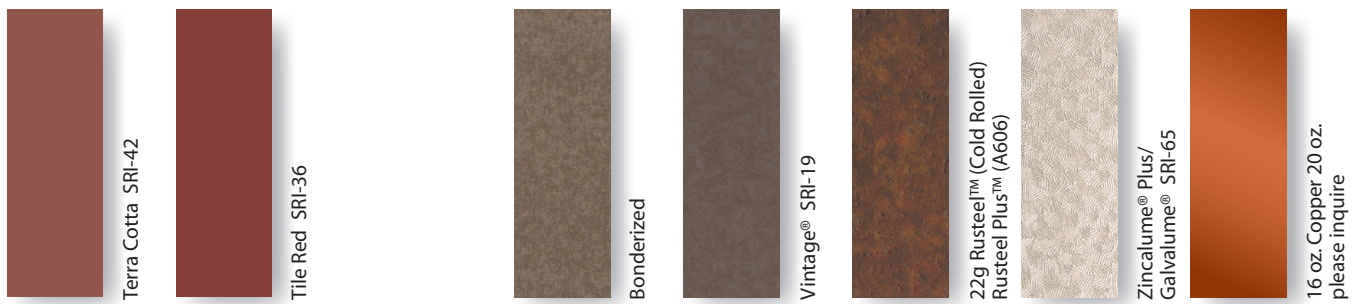


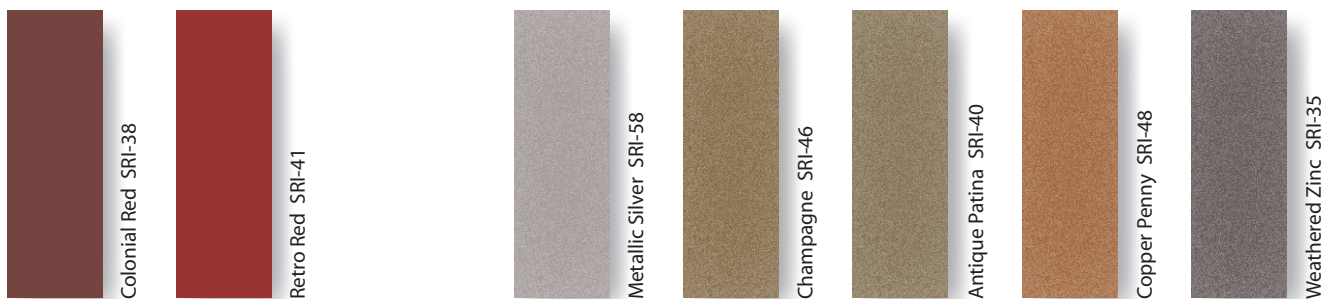
Standard KYNAR 500® Coatings - See chart on back for product availability



Specialized Material



Premium Metallic KYNAR 500® Coatings



in partnership with:



PPG Coatings Protected





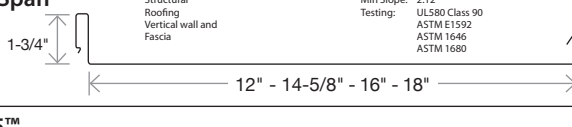
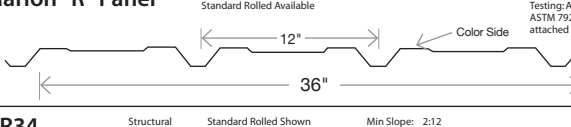







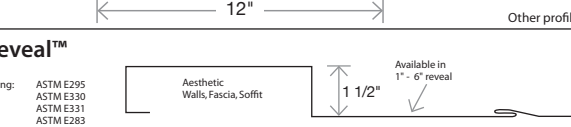


steelscape

SRI=Solar Reflective Index. SRI values listed above are in accordance with ASTM E1980 and are based on actual testing. (CRRC) Cool Roof Rating Council SRI values (CA Title 24, ENERGY STAR®) are based on the grouping of colors (color families) CRRC SRI values will differ, as each color is not tested in the color family option. Coatings are low gloss 10-15% sheen. These printed chips provide a close representation of the colors. Metal samples are available upon request. Custom colors available. "Oil canning" is an inherent characteristic of roof and wall products, and not a defect, which is not a cause for panel rejection.

Taylor Metal Products Cool Kynar 500®

All Taylor Metal Products Kynar 500® coatings utilize pigments that are specifically designed to reflect infrared light, help reduce the heat gain of a dwelling, and conform with ENERGY STAR® criteria for steep slope cool roofing products.

PVDF is a fluoropolymer that is manufactured under the trademarked name Kynar 500®. Paint finishes containing a **minimum** 70% PVDF resin meet the high-performance weathering criteria established by the American Architectural Manufacturing Association and are allowed to carry the Kynar 500® trademarked name.

Profile	
Easy-Lock™  Aesthetic Roofing Vertical wall and Fascia Min Slope: 3:12 Testing: ULS80 Class 90 12" - 16" - 18" Inquire for 18"	PBR  Reverse Rolled Shown Standard Rolled Available Min Slope: 1:12 pitch Testing: ASTM 653, ASTM 792, UL rated when attached to a steel purlin. 12" - 36"
Versa-Span™  Structural Roofing Vertical wall and Fascia Min Slope: 2:12 Testing: ULS80 Class 90, ASTM E1592, ASTM 1646, ASTM 1680 12" - 14-5/8" - 16" - 18"	Marion "R" Panel™  Reverse Rolled Shown Standard Rolled Available Min Slope: 1:12 pitch Testing: ASTM 653, ASTM 792, UL rated when attached to a steel purlin. 12" - 36"
CL-175™  Aesthetic Roofing Vertical wall and Fascia Min Slope: 3:12 12"	HR34  Structural Roof Wall Standard Rolled Shown Reverse rolled available Min Slope: 2:12 Testing: ASTM E283, ASTM E330, ASTM E331 6-7/8" - 1-3/4" - 34" - 1-1/2"
MS200™  Structural Roofing Vertical wall and Fascia Min Slope: 5:12 Testing: ULS80 Class 90, ASTM E1592, ASTM 1646, ASTM 1680, ASTM E2140 12" - 14-5/8" - 16" - 18"	Classic 7/8" Corrugated™  Structural Roof Wall Min Slope: 2:12 Testing: ASTM E283, ASTM E330, ASTM E331 7/8" - 32" - 2-5/8"
MS100/MS150/Curved  Structural Roofing Vertical wall and Fascia Min Slope: 1:12 Testing: ULS80 Class 90, ASTM E1592, ASTM 1646, ASTM 1680 MS 150 includes ASTM E2140 1-1/2" - 12" - 21"	Contour 16"™  Aesthetic Wall Testing: ASTM E283, ASTM E330, ASTM E331 16" - 3/4"
Smoothwall™/Lifetime Soffit™  Aesthetic Walls, Fascia, Soffit Available with perforation Testing: ASTM E283, ASTM E330, ASTM E331 1 - 1-1/2" - 12" & 12-5/8"	Contour 12"™  Aesthetic Wall Testing: ASTM E283, ASTM E330, ASTM E331 12" - 1-1/4"
ShadowLine™  Testing: ASTM E283, ASTM E330, ASTM E331 Aesthetic Walls, Fascia, Soffit Available with perforation 1 - 1-1/2" - 12" minimum	Reveal™  Testing: ASTM E295, ASTM E330, ASTM E331, ASTM E283 Aesthetic Walls, Fascia, Soffit 1 1/2" - 6"

Coil Width	OR/WA	Panels	Gauge	Glacier White	Sierra Tan	Parchment	Sterling Grey	Zinc Grey	Charcoal Grey	Saddle Tan	Medium Bronze	Tahoe Blue	Pacific Blue	Hemlock Green	Forest Green	Pine Green	Dark Bronze	Black	Burgundy	Musket	Terra Cotta	Tile Red	Bonderized	Vintage®	22g Rusteel™ (cold rolled)	22g Rusteel Plus™ (A906)	Zincalume® Plus	16 & 20 oz. Copper	Colonial Red	Retro Red	Metallic Silver	Champagne	Antique Patina	Copper Penny	Weathered Zinc		
16.75"		12" Easy-Lock 12.75" MS150 13.75" MS100 12" CL-175 1" Smoothwall/ Soffit/ShadowLine	24	x		x		x	x		x	x	x		x	x	x	x						*	*	*	*	x	*							x	
		26	x	x		x		x	x	x	x	x	x	x	x	x	x	x	x			x							x							x	
20.625"		16" Easy-Lock 16.625" MS150 17.625" MS100 12" Versa-Span 12" MS200 14.625" Versa-Span 14.625" MS200 12" Reveal 1-1/2" Smoothwall/ Soffit/ShadowLine	24	x	x		x	x	x	x	x	x	x	x	x	x	x	x			x	x	x	*	*			x	*				x	x	x	x	x
		22	x					x	x		x														*	*						x				x	
24"		18" Easy-Lock 18" Versa-Span 18" MS200 16" Versa-Span 16" MS200 20" MS150 16" Contour 21" MS100 12" Contour	24	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x			x	x	x	x			x	*	x	x	x	x	*	*	*	x	
		22	x					x	x		x															x	x	x				x				x	
43"		7/8" Corrugated PBR Marion "R" Panel HR-34	24	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x			x	x	x	x			x	x	x	x	x	x	x	x	x		
		22	x																							x	x	x								x	
48"		Flat Sheet 48"W x 120"L	24	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x			x	x	x	x			x	x	x	x	*	*	*	x			
		22	x																							x	x	x								x	

Zincalume & Zincalume® Plus are registered trademarks of Bluescope Ltd. Galvalume® is a registered trademark of BIEC International, Inc. Vintage® is a registered trademark of Steelscape, Inc. Kynar 500® is a registered trademark of Arkema, Inc. Residential: 40 year, Transferable, Non-Prorated, Limited Manufacturer's Warranty Commercial: 30 year, Non-Transferable, Non-Prorated, Limited Manufacturer's Warranty

22 Gauge material available, please call to inquire
 * Please inquire for availability